


Metric-Size Closed-End Punch Strippers with Retaining Shoulders

Tough as Steel, Resilient as Rubber.

Product Features

- Very High Load bearing capacities
- Strippers are smaller in size than steel or rubber strippers for exerting the same pressure.
- Smaller design enables closer center-to-center distance for punches.
- Ideal for punching odd shaped holes.
- Assures positive stripping
- Urethane strippers are safer than steel springs, since they do not fragmentize, preventing damage to Dies or injury to operators.
- Designed to comply with NAAMS (North American Automotive Metric Standard) & FORD World Standard.

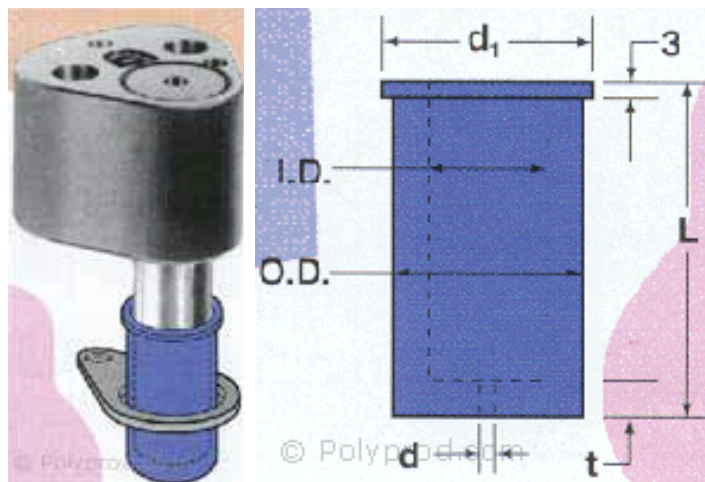

- The shoulder design of the DIE-THANE™ stripper prevents the strippers from falling into the die.
- Fits most standard retainers for head type and ball lock type punches.

STANDARD DUROMETER : 95 A; STANDARD COLORS : BLACK				
Part Number	I.D mm (Fits Punch Body Dia)	O.D mm	Length mm	Air Hole Size mm
PSM- 06- 45	6	19	45	1.6
PSM- 06- 53	6	19	53	1.6
PSM- 06- 71	6	19	71	1.6
PSM- 08- 45	8	21	45	1.6
PSM- 08- 53	8	21	53	1.6
PSM- 08- 71	8	21	71	1.6
PSM- 10- 45	10	23	45	1.6
PSM- 10- 53	10	23	53	1.6
PSM- 10- 56	10	23	56	1.6
PSM- 10- 71	10	23	71	1.6
PSM- 13- 45	13	26	45	3.2
PSM- 13- 53	13	26	53	3.2
PSM- 13- 56	13	26	56	3.2
PSM- 13- 71	13	26	71	3.2
PSM- 16- 45	16	30	45	3.2
PSM- 16- 53	16	30	53	3.2
PSM- 16- 56	16	30	56	3.2
PSM- 16- 71	16	30	71	3.2
PSM- 20- 45	20	38	45	3.2
PSM- 20- 53	20	38	53	3.2
PSM- 20- 71	20	38	71	3.2
PSM- 25- 45	25	50	45	3.2
PSM- 25- 53	25	50	53	3.2
PSM- 25- 71	25	50	71	3.2

STANDARD DUROMETER : 95 A; STANDARD COLORS : RED & BLUE				
Part Number	I.D mm (Fits Punch Body Dia)	O.D mm	Length mm	Air Hole Size mm
PRS- 10- 43	10	18	43	1.6
PRS- 10- 52	10	18	52	1.6
PRS- 10- 63	10	18	63	1.6
PRS- 10- 72	10	18	72	1.6
PRS- 13- 43	13	23	43	3.0
PRS- 13- 52	13	23	52	3.0
PRS- 13- 63	13	23	63	3.0
PRS- 13- 72	13	23	72	3.0
PRS- 16- 43	16	28	43	3.0
PRS- 16- 52	16	28	52	3.0
PRS- 16- 63	16	28	63	3.0
PRS- 16- 72	16	28	72	3.0
PRS- 20- 43	20	33	43	3.0
PRS- 20- 52	20	33	52	3.0
PRS- 20- 63	20	33	63	3.0
PRS- 20- 72	20	33	72	3.0
PRS- 25- 43	25	40	43	3.0
PRS- 25- 52	25	40	52	3.0
PRS- 25- 63	25	40	63	3.0
PRS- 25- 72	25	40	72	3.0
PRS- 32- 43	32	50	43	3.0
PRS- 32- 52	32	50	52	3.0
PRS- 32- 63	32	50	63	3.0
PRS- 32- 72	32	50	72	3.0
PRS- 38- 52	38	60	52	3.0
PRS- 38- 63	38	60	63	3.0
PRS- 38- 72	38	60	72	3.0
PRS- 40- 43	40	60	52	3.0
PRS- 40- 52	40	60	63	3.0
PRS- 40- 63	40	60	72	3.0